


busSTRUT

BREAKERS


(2F) two circuits
up to 20 Amps ($20A \times 2 = 40A$)

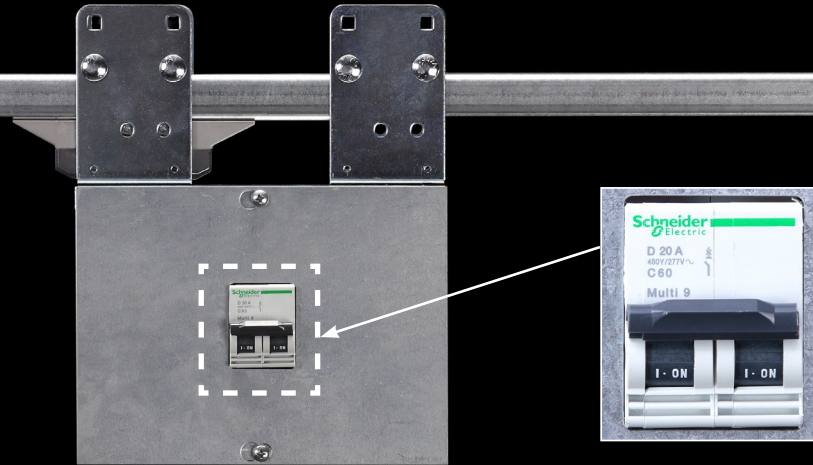

busSTRUT : GALVANIZED
line-feed : galvanized

BREAKERS


(2F) two circuits
up to 40 Amps ($40A \times 2 = 80A$)

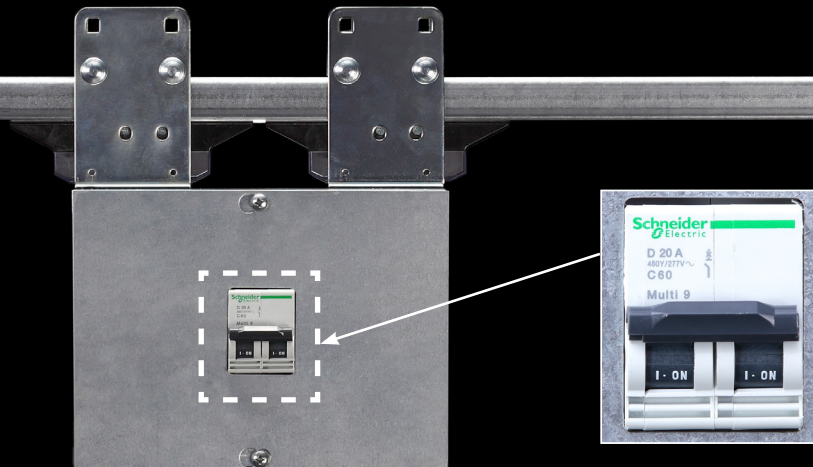

busSTRUT : GALVANIZED
line-feed : galvanized

LINE-FEED: BREAKER LIMITERS


BREAKERS
 (2P) two circuits
 up to 20 Amps (20A x 2 = 40A)

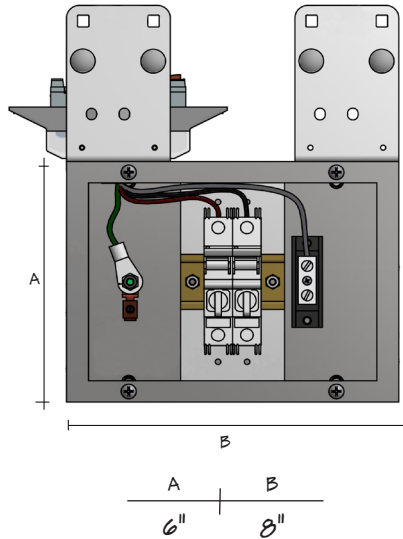

busSTRUT (single and double-deck)


Product	Voltage	Amp	Catalog Number
LINE-FEED (BREAKERS)	UNIVERSAL	20	P20-3-40-UNIV-CB20-(F)
	120/277	Custom	P20-3-40-UNIV-CBXX-(F)

Finish - G=Galvanized W=White B=Black
 Custom Amperages Available

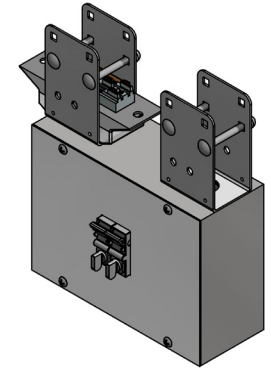

Breakered line-feed (up to 20 Amps) can be positioned anywhere on busSTRUT to reduce the length of homeruns. Features a 3 Pole Fitter that powers up to two 20A circuits; 40A max. Available in galvanized, powder coated white and black. Universal 120/277V. Mounts to both single and double-deck busSTRUT/20. Factory installed Circuit Breakers.


BREAKERS
 (2P) two circuits
 up to 40 Amps (40A x 2 = 80A)

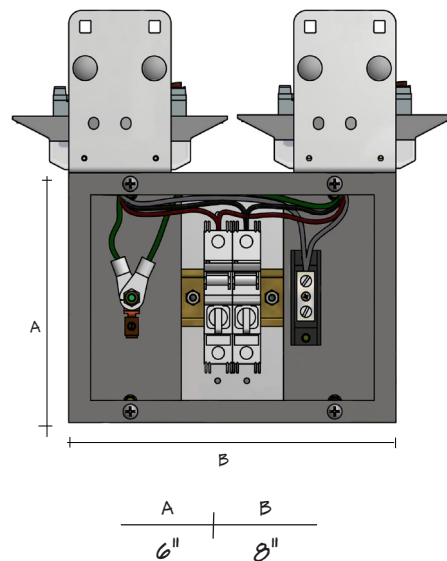

busSTRUT (single and double-deck)

Product	Voltage	Amp	Catalog Number
LINE-FEED (BREAKERS)	UNIVERSAL	40	P40-3-80-UNIV-CB40-(F)
	120/277	Custom	P40-3-80-UNIV-CBXX-(F)

Finish - G=Galvanized W=White B=Black
 Custom Amperages Available

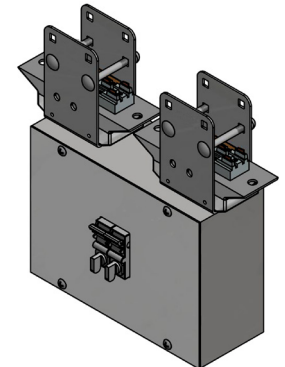

Breakered line-feed (up to 40 Amps) can be positioned anywhere on busSTRUT to reduce the length of homeruns. Features two 3 Pole Fitters that power up to two 40A circuits; 80A max. Available in galvanized, powder coated white and black. Universal 120/277V. Mounts to both single and double-deck busSTRUT/40. Factory installed Circuit Breakers.