



busSTRUT

FNQ-R FUSES
(2F) two circuits
up to 20 Amps (20A x 2 = 40A)

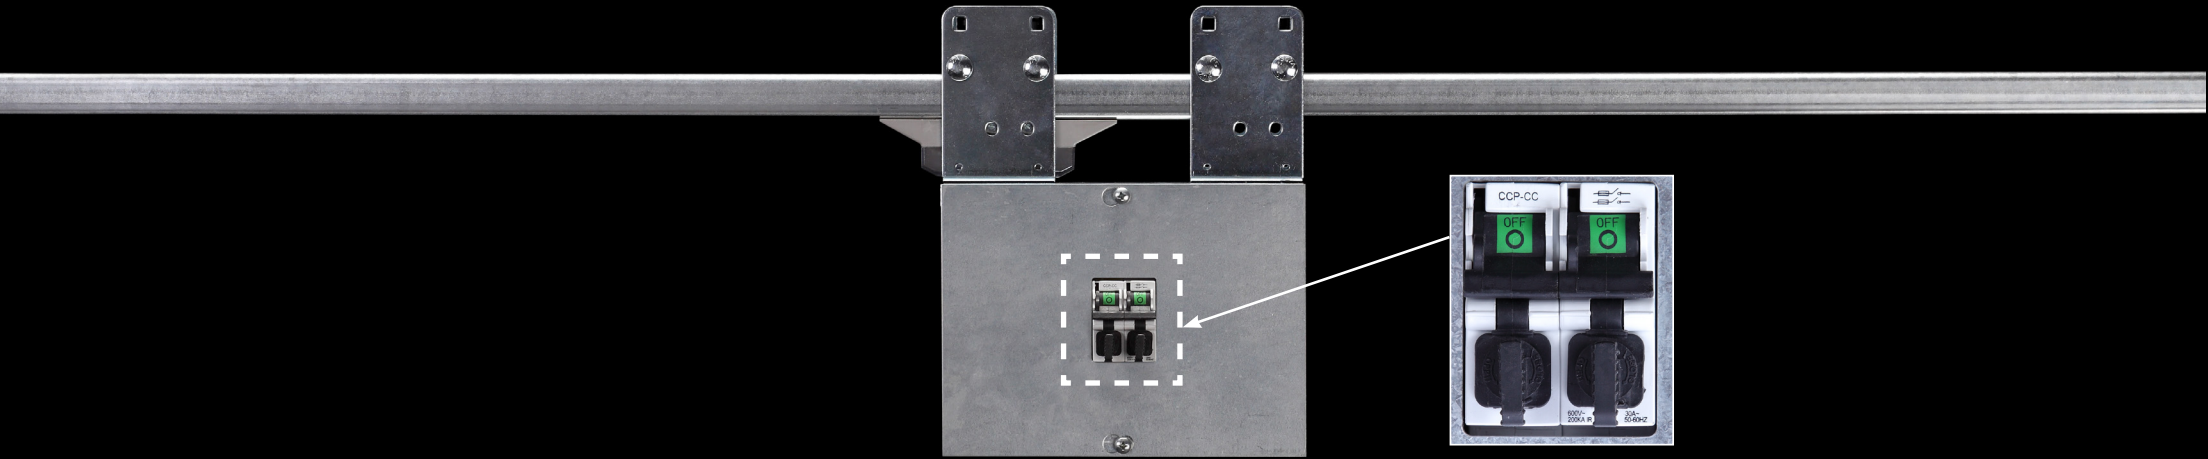

busSTRUT : GALVANIZED
line-feed : galvanized


FNQ-R FUSES
(2F) two circuits
up to 30 Amps (30A x 2 = 60A)

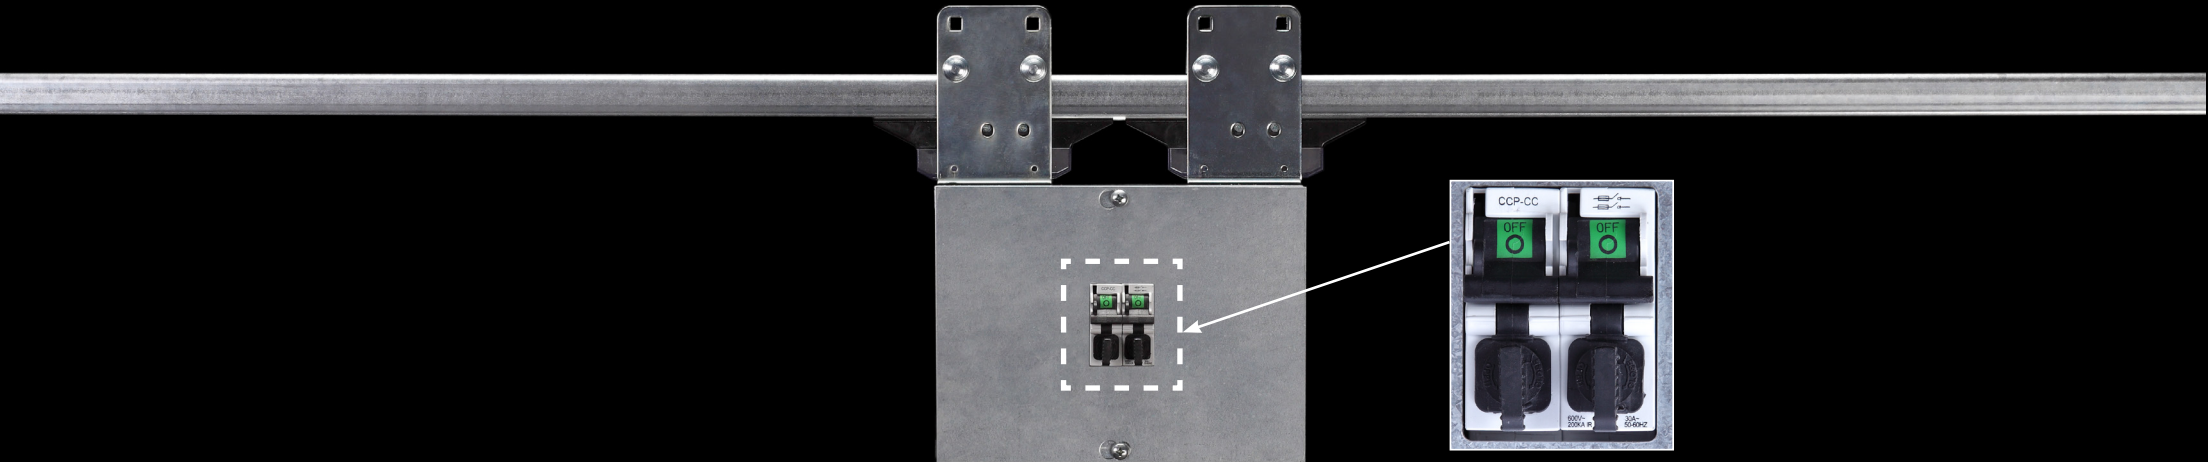

busSTRUT : GALVANIZED
line-feed : galvanized

LINE-FEED: FUSED LIMITERS

FNQ-R FUSES
 (2P) two circuits
 up to 20 Amps (20A x 2 = 40A)

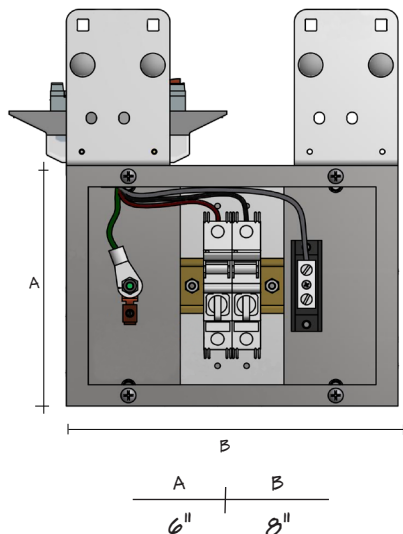


busSTRUT (single and double-deck)			
Product	Voltage	Amp	Catalog Number
LINE-FEED (FUSED)	UNIVERSAL 120/277	Standard	P20-3-40-UNIV-FD-(F)-(20)
		Custom	P20-3-40-UNIV-FD-(F)-(XX)

Finish - G=Galvanized W=White B=Black
 Option Code - Custom Amperages Available


XX = CUSTOM AMPERAGE FNQ-R FUSES (CONSULT) :

5	10
6	12
7	15
8	17 1/2
9	20

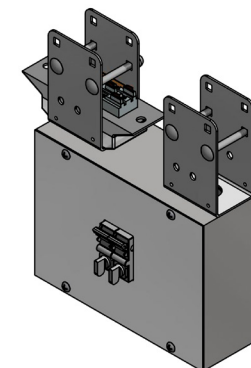

Fused line-feed (up to 20 Amps) can be positioned anywhere on busSTRUT to reduce the length of homeruns. Features a 3 Pole Fitter that powers up to two 20A circuits; 40A max. Available in galvanized, powder coated white and black. Universal 120/277V. Mounts to both single and double-deck busSTRUT/20. Factory installed Fuse Holders.

FNQ-R FUSES
 (2P) two circuits
 up to 30 Amps (30A x 2 = 60A)

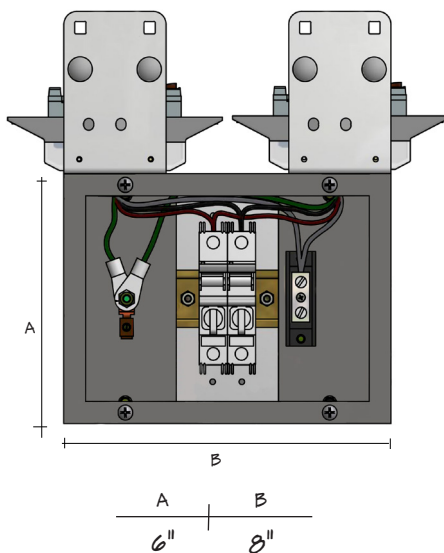


busSTRUT (single and double-deck)			
Product	Voltage	Amp	Catalog Number
LINE-FEED (FUSED)	UNIVERSAL 120/277	Standard	P40-3-60-UNIV-FD-(F)-(30)
		Custom	P40-3-60-UNIV-FD-(F)-(XX)

Finish - G=Galvanized W=White B=Black
 Option Code - Custom Amperages Available

XX = CUSTOM AMPERAGE FNQ-R FUSES (CONSULT) :

5	12
6	15
7	17 1/2
8	20
9	25
10	30

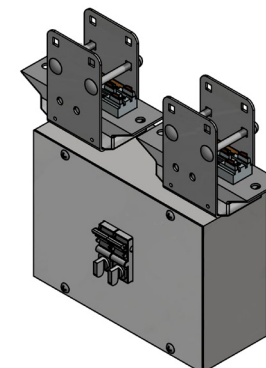

Fused line-feed (up to 30 Amps) can be positioned anywhere on busSTRUT to reduce the length of homeruns. Features a pair of 3 Pole Fitters that power up to two 30A circuits; 60A max. Available in galvanized, powder coated white and black. Universal 120/277V. Mounts to both single and double-deck busSTRUT/40. Factory installed Fuse Holders.