

busSTRUT

SINGLE-DECK



busSTRUT : GALVANIZED



DOUBLE-DECK



LENGTH



busSTRUT : GALVANIZED

SINGLE-DECK

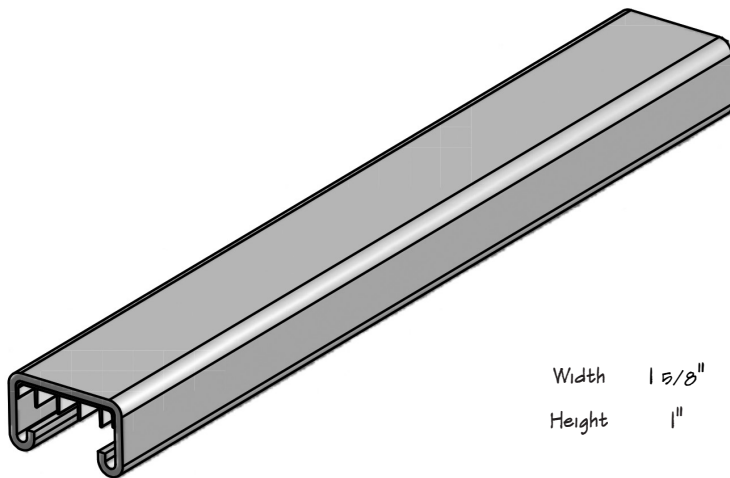

Width 1 5/8"
Height 1"

DOUBLE-DECK

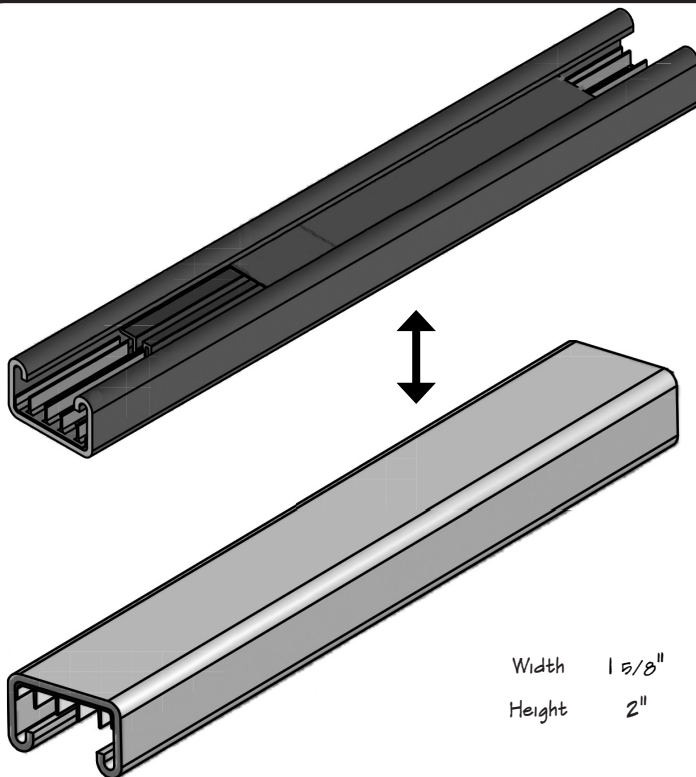


Width 1 5/8"
Height 2"

busSTRUT				
SINGLE / DOUBLE-DECK (two single lengths of busSTRUT)				
			(L)	(F)
20 AMP	120V	M20-3-40-120-	2.5' 05' 10' 20'	G SC SW SB
	277V	M20-3-40-277-		
40 AMP	120V	M40-3-80-120-	2.5' 05' 10' 20'	G SC SW SB
	277V	M40-3-80-277-		
EMPTY	NON-POWERED	M00-	2.5' 05' 10' 20'	G SC SW SB

busSTRUT is PREWIRED, 1-5/8" x 1", 12 Ga. steel, 3 Pole busway. Runs, rows, and grids are all "Plug & Play." Specify busSTRUT/20 (two 20A circuits) and/or busSTRUT/40 (two 40A circuits) in galvanized, sleeved copper, white, or black in 2.5', 5', 10', and 20' lengths. busSTRUT/20 is mainly for use with light fixtures. busSTRUT/40 is for power distribution. busSTRUT lengths work together effortlessly. There are no visual differences so the look is integrated, sleek, and uncluttered.

Finish - G=Galvanized SC=Sleeved Copper SW=Sleeved White SB = Sleeved Black

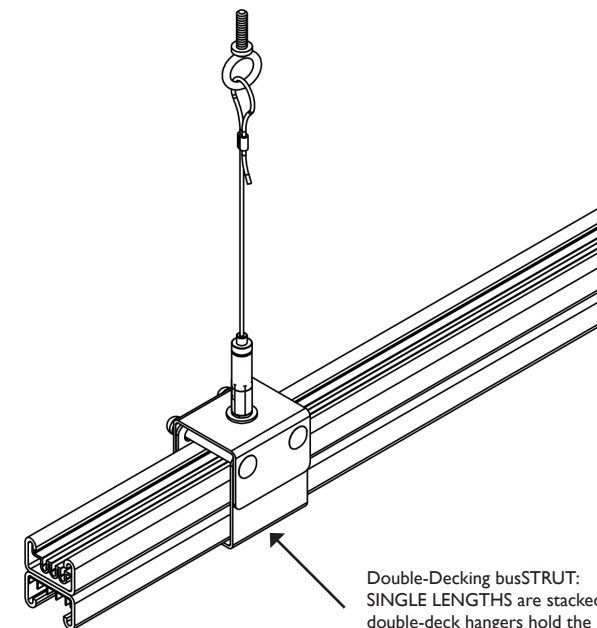

Double-Decking busSTRUT: SINGLE LENGTHS are stacked and double-deck hangers hold the individual lengths together.