


## THE "LUCY"

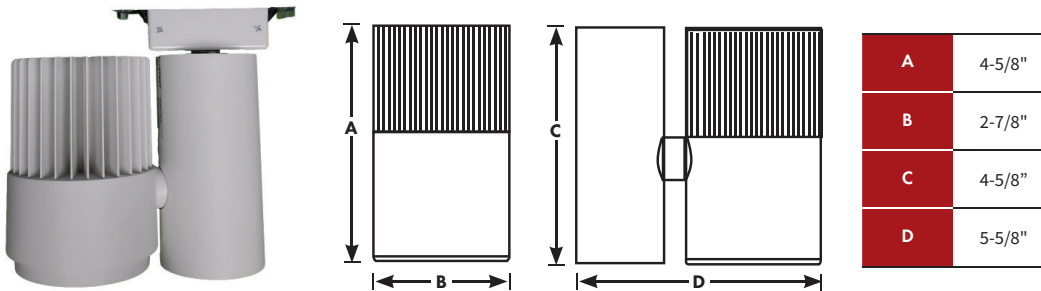


## FEATURES

- Beautifully constructed with high quality architectural grade die-cast aluminum
- Precision optics are uniquely constructed to intentionally regress the position of the LED array for glare control.
- Multiple accessories are also available for further glare control.


busSTRUT	VOLTAGE	TECH	KELVIN TEMP (CCT)	Color Rendering Index (CRI)	DELIVERED LUMENS	WATTS	LM/W	BEAM ANGLE	FINISH (F)	OPTION CODES (OC)	CATALOG NUMBER
20A	120/277V	LED	3000K	90+	2,900	36	80	24	GR=GREY BL=BLACK WH=WHITE	SN=Snoot HL=Honeycomb Louver	BR-LUCY-U-309-36-U-(F)-(OC)

## CANDLEPOWER

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

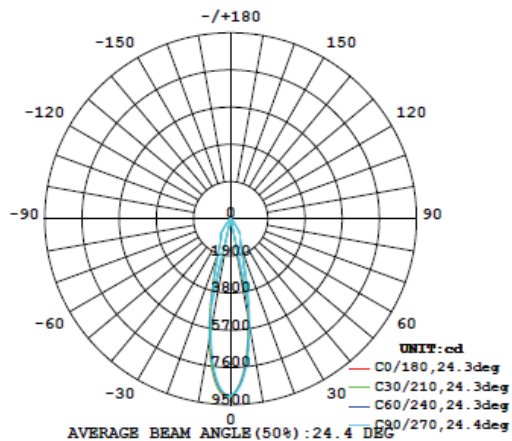

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

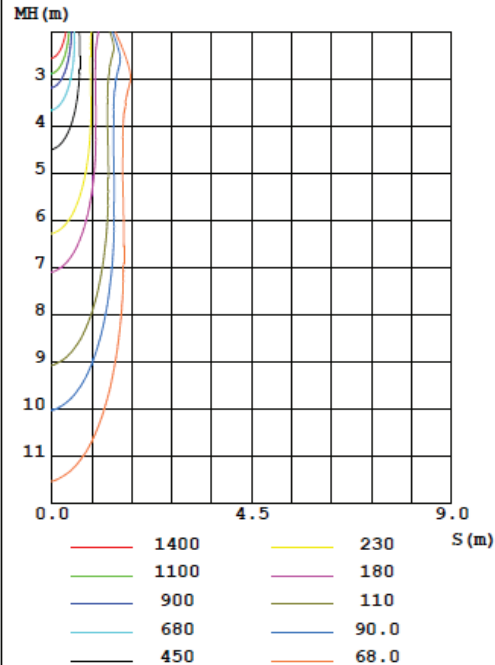

## OPTIONS TO FURTHER REDUCE GLARE:

SNOOT  
(FINISH TO MATCH)



HONEYCOMB  
LOUVER

