
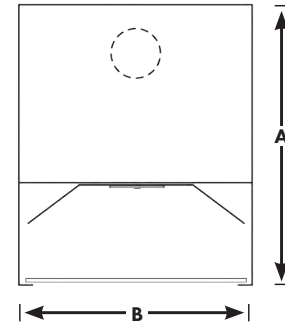


FEATURES

- High efficiency driver coupled with long-life LEDs, service life greater than 50,000 hours (L70)
- In-directly suspended from cable/powered from busSTRUT whip cord

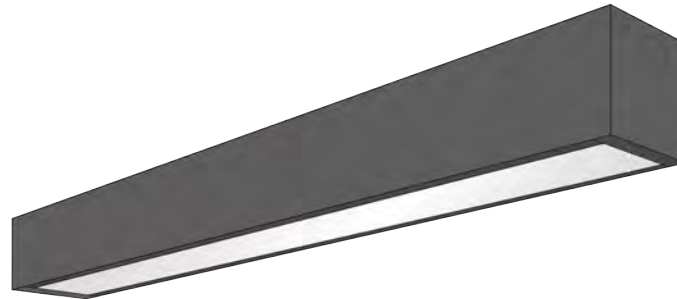


A	4"
B	4"

BACK PLATE

⊕ 0.875" Dia. K.O. for busSTRUT™ 30" Whip

○ 1/4 Dia. Hole for mounting

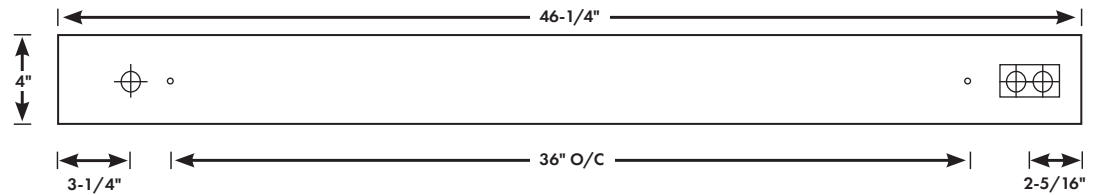

busSTRUT	TYPE	SIZE/LENGTH	LUMENS	CCT/CRI	DELIVERED LUMENS	SYSTEM WATTS	LUMINAIRE EFFICACY	FINISH	CATALOG NUMBER
BR	STANDARD	4'	3,000	3,000/80+	2,000	20.4	98 LPW	Black (B)	BRL-4-20L-30K80-NT-24WP-B
	HIGH OUTPUT		6,000		4,000	40.8	99.6 LPW		BRL-4-40L-30K80-NT-24WP-B