


bvsSTRUT : GALVANIZED  
fixture : silver

**LW LED WALLWASH**  
'UNIBODY' with Louver Blades  
LI Lumen Package


LED WALLWASH

TYPE	Fixture				LED Board				Ballasts		Louver Color	Mnt Kit Color	Option Codes	Finishes	Catalog Number
	busSTRUT	Type	Length	Delivered Lumens	Type	No.	Lumens	Watts	No.	Voltage	(LC)	(MK)	(OC)	(F)	
<b>LED LWseries</b> <b>LOUVER WALLWASH</b> Adjustable	BR	LED	4'	2460	LED	1	2460	21	1	Universal 120/277	WT= White BL=Black GR=Grey	WT= White BL=Black GV=Galv	LI = 4000K/80CRI	WT = White BL = Black SV = Silver	<b>BR-LED-2K-U-GR-GV-LI-(F)</b>

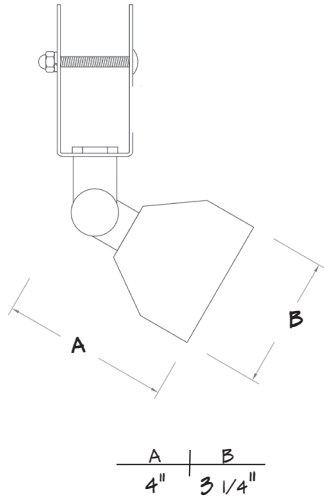


Series Number	Lamps Qty	Lamps Type	Nominal Length
LW	1	LED	4'

48"

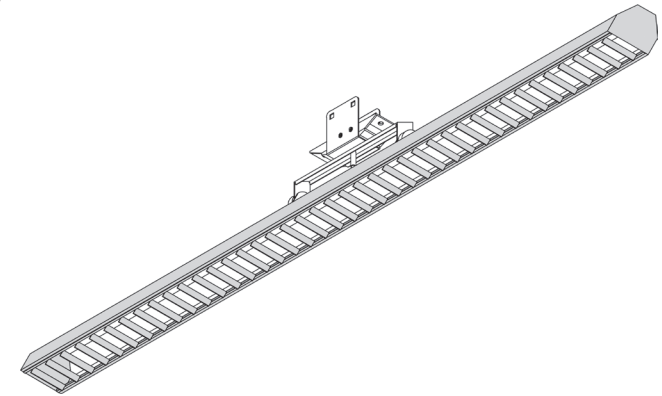

## CANDLEPOWER:

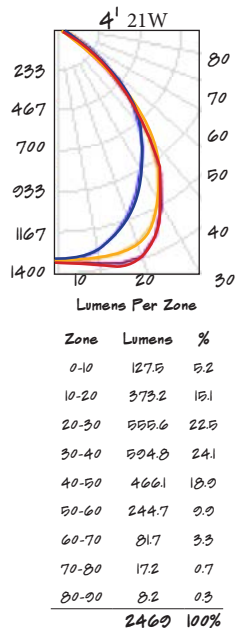

### Type:

- Extruded power coated aluminum LED fixture incorporating an LED. Integral electronic driver provides efficient and quiet power.

-5/8" louver provides optimum performance and cut off of increased aesthetics and light control.

### Features:

- Heavy duty extruded aluminum body with end caps
- Low profile, aesthetic design
- Integral 5/8" Louver
- High-strength stainless steel electric contacts

### Finish:

-Powder coated finish

### Colors:

- Three standard colors
  - WT - Sky white (DuPont® PFW665S9)
  - BL - Matte black (DuPont® UFB634S2)
  - SV - Camaro silver (DuPont® UFA402M9)

### Reflector:

-0.020 aluminum polished to mirror quality clear specularity.

### Driver:

- 120V/277V 50/60 Hz input
- Class 2 power supply
- Over voltage, over current and short protection:Auto recovery
- MTBF > 100,000
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended.